

## ALZO 720L On-Camera LED Video Light

### Included in the kit:

- A. ALZO 720 "TWIN" LED VIDEO LIGHT
- B. BATTERY CHARGER w/AC cord
- C. 12 volt DC charger cord
- C. NP-F770 BATTERY
- D. SHOE MOUNT

### AC CHARGING THE BATTERY:

Insert the **AC power cord** into the socket on the charger. Fully insert the battery into the charger. Connect the charger to a 110-240 volt AC outlet. Battery is fully charged when the **CHARGE** indicator is green.


### 12 VOLT DC CHARGING THE BATTERY:

Fully insert the battery into the charger. Using the **12 volt battery charger cord**, connect the charger to the cigarette lighter in an auto or other suitable 12 volt socket. The 12 volt charger includes a ½ amp replaceable fuse under the tip of the battery connector.

### INSTALL THE BATTERY IN THE LIGHT

Slide the charged battery into the light with the connector end facing down. Push down until it snaps into place. To remove the battery push the BATT lock to the right until the battery is released then slide it off of the light.

A fully charged battery will operate the light at 100% power for about 1.5 hours continuous. The battery life is extended when the light is used with a reasonable duty cycle like 30-50% providing minimum 10 minute rest periods. The battery will recharge to 80% capacity from the AC adaptor in about 1.5 hour.

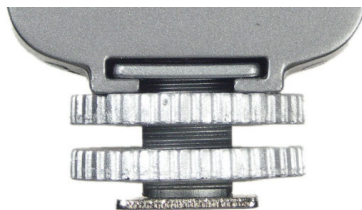

### ATTACHING the LIGHT to a CAMERA

The gray plastic end of light mount fits in the base of the light. Tighten the thumb wheel locks on the light base and the camera mount.



**NOTE:** The battery charger has 2 buttons on the side and 2 LEDs on top that can be used as a flash light with a charged battery attached.



### Setup and Usage:

The color correction flip down filter and the diffuser can be used individually or combined. The diffuser aids in softening the edge of the cast light. The color correction filter reduces the light output almost 2 f-stops.

If you have additional questions regarding the application of this unit, we welcome you to contact us directly. [csupport@alzodigital.com](mailto:csupport@alzodigital.com) or 800-582-7009.